


The Coastal Collection



Featuring
**Porcelain Paver in
 3 Convenient Pattern Sets**

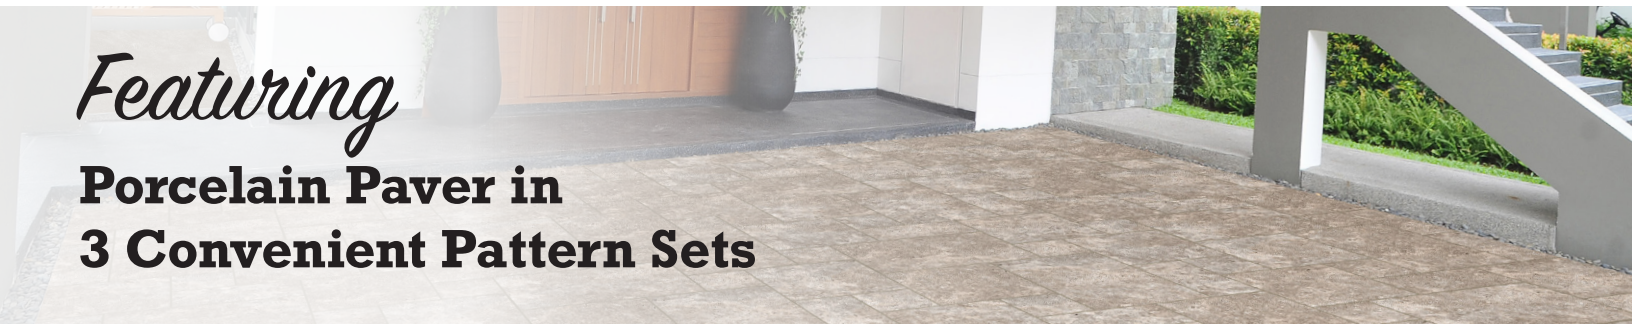


COASTAL BEIGE



COASTAL SILVER

VERSAILLES PATTERN

Chiseled edge
4-Size set

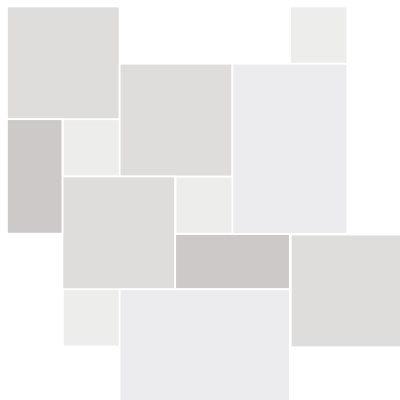


VECTORED PATTERN

Chiseled edge
3-Size set



CLASSIC PATTERN

Straight edge
1-Size set



COPING

6" x 12"



12" x 12"



INSTALLATION GUIDES


EXTERIOR FLOOR OVER SOIL, SAND, & FLEXIBLE BASE/ASPHALT

FLEXIBLE BASE/ASPHALT INSTALL

The asphalt or base must be dug up at minimum 6" from the edge of any pavement or curb. An edge restraint system with a vertical height of 1.5" (4cm) is recommended around the perimeter. A 3/4" uncompacted sand bedding is to go directly over the base. Pavers must have a 1" in 10' pitch sloped away from any building structures unless otherwise specified. Plastic support spacers are recommended at the corners.

LAYERED SYSTEM ASSEMBLY

1. Paver
2. 3/4" of uncompacted sand
3. 4" of crushed gravel/road base
4. Filter fabric
5. Edge restraint
6. Polymeric sand

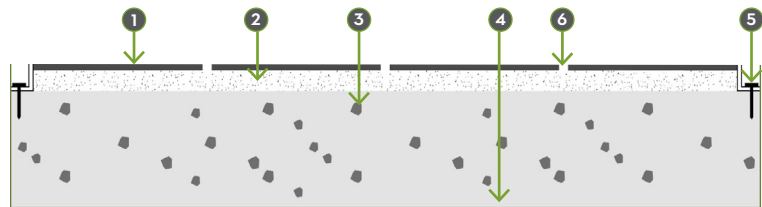


EXTERIOR FLOOR OVER SAND

TYPICAL FLEXIBLE BASE INSTALLATION OVER SAND

Filter fabric is to be installed with a minimum of 1" of sand as a base. The use of an edge restraint is recommended but not required around the perimeter. Plastic support spacers are recommended at the corners with a spacing of at least 3/8".

LAYERED SYSTEM ASSEMBLY

1. Paver
2. 3/4" - 1" of uncompacted sand
3. 4-6" crushed base
4. Filter fabric
5. Polymeric sand

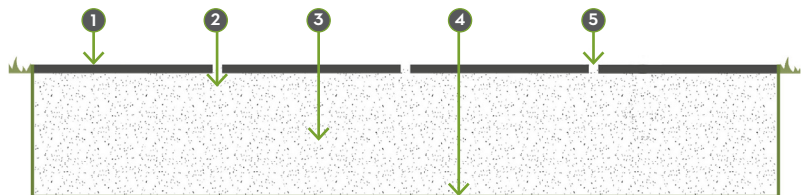


EXTERIOR FLOOR OVER PERMIABLE OVER GRAVEL

An edge restraint system with a vertical height of 1.5" (4cm) is recommended around the perimeter. Pavers must have a 1" in 10' pitch sloped away from any building structures unless otherwise specified. Plastic support spacers are recommended at the corners with a 3/16" joint. The joint should be filled with grout, sand, or a slurry.

LAYERED SYSTEM ASSEMBLY

1. Paver
2. 2" of gravel size approximately 1/2" or less
3. 4" of gravel size approximately 3/4"
4. 6" of gravel size approximately 1"-2"
5. Filter fabric
6. Edge restraint
7. Polymeric sand

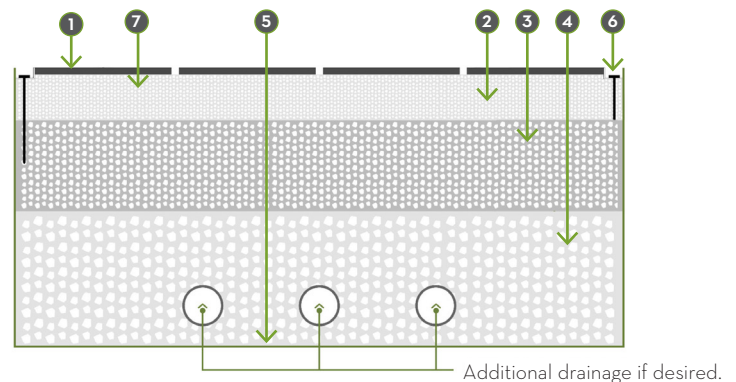


EXTERIOR FLOOR OVER GRASS

DRY LAY OVER GRASS

Cut grass as short as possible where pavers will be placed. Using a rake, comb over the area to remove any additional loose dirt and debris up to 1" in depth. Level any soil on the surface. Pavers must have a 1" in 10' pitch sloped away from any building structures unless otherwise specified. Plastic support spacers are recommended at the corners.

LAYERED SYSTEM ASSEMBLY

1. Paver
2. Soil/grass

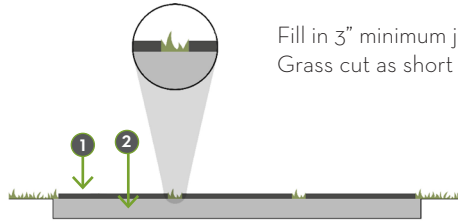


Fill in 3" minimum joints with soil and seed.
Grass cut as short as possible.

EXTERIOR FLOOR OVER MORTAR

When going over existing concrete, ensure that the surface of the slab is both cleaned and etched prior to adhering tiles.

LAYERED SYSTEM ASSEMBLY

1. Saw-cut control joints
2. Porcelain Landscape Tile 3/4" (20mm) thick
3. 3/16" (5mm) joint with impervious polymeric jointing sand or modified latex grout or polyurethane sealant / caulk (must be suitable for exterior horizontal surfaces)
4. Poured-in-place reinforced concrete slab 4" - 8" (100mm-200mm) thick 2% slope for drainage
5. Modified mortar bedding using 1/4" - 3/8" (6mm-10mm) notched trowel
6. Geo-textile / geogrid

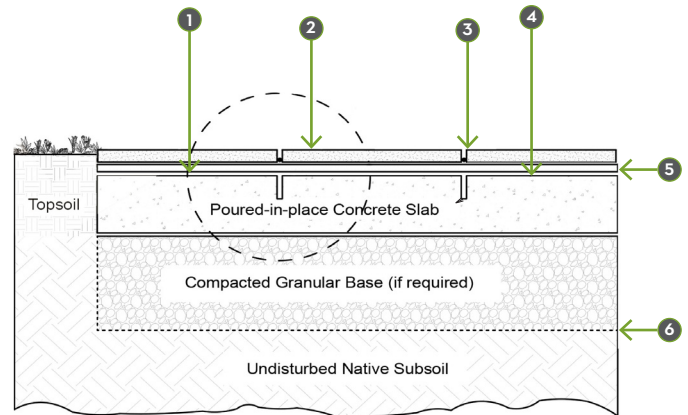


EXTERIOR FLOOR OVER PEDESTALS ON CONCRETE AND ROOF TOPS

PEDESTAL

Slope underneath pavers must have a 1" in 10' pitch away from any building structures unless otherwise specified. Pedestals act as a support and spacer. Joints typically remain unfilled. Refer to pedestal manufacturer instructions for additional notes on placement, frequency and additional support under each paver. Substrate to be firm and stable.

LAYERED SYSTEM ASSEMBLY

1. Paver
2. Pedestal
3. Waterproofing membrane (as needed)
4. Existing substrate

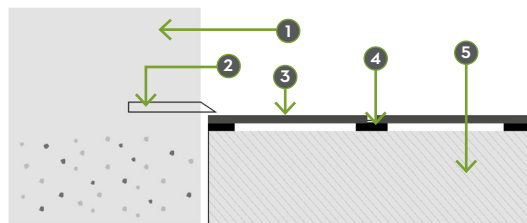

PORCELAIN HARDSCAPES LIFETIME LIMITED WARRANTY

Emser Tile and Natural Stone warrants that the porcelain pavers sold by Site-One are in accordance with ANSI standards and will either meet and/or exceed the performance specifications outlined in these requirements. Any obvious defects such as shade, appearance, manufacturing defects, caliber or finish should be communicated prior to installation. Failure to do so could result in nullification of the guarantee. This warranty is transferrable as long as the proper receipt of payment and supporting documentation is shared with the new owner.


This warranty for material is only valid if installed by a Site-One certified contractor, following appropriate installation methods. This warranty only applies to residential applications, not to commercial applications or product that has been moved from its original installation area are not covered. To make this claim under warranty, we request notification as soon as possible, but will only accept claims up to one year after installation with documentation detailed installation date. For any warranty services, please contact the Site-One dealership of original purchase and they will assist in guiding you through the process. That process will involve a representative of Site-One acting as a claim representative coming to inspect your complaint in no less than ten (10) working days from the first initial claims call, unless otherwise communicated verbally or in writing.

This warranty is a lifetime limited transferrable warranty and shall constitute the full extent of liability. This warranty is in place of all other warranties; including but not limited to any expressed or implied warranty of fitness for a particular purpose. Please follow all product guidelines for care and maintenance to ensure the beauty and integrity of your purchase for years to come. Buyer agrees that its sole and exclusive remedies for breach of this limited warranty, and the sole and exclusive obligations of manufacturer with respect to any claims for breach of this limited warranty, shall be those remedies expressly set forth herein.



VERSAILLES SET

CHISELED EDGE

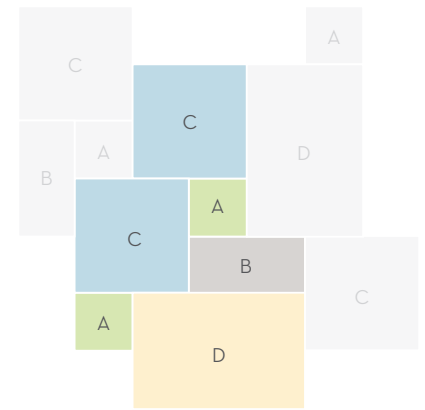


4 Size Set CARTON INCLUDES:			
LAYOUT KEY	SIZE	QTY	SQ FT
A	8" x 8"	2 pieces	.9
B	8" x 16"	1 pieces	.9
C	16" x 16"	2 pieces	3.5
D	16" x 24"	1 pieces	2.7
TOTAL		6 pieces	8 sq. ft
Actual = 192.5 sf per pallet		1,830 lbs per pallet	



VECTORED SET

CHISELED EDGE

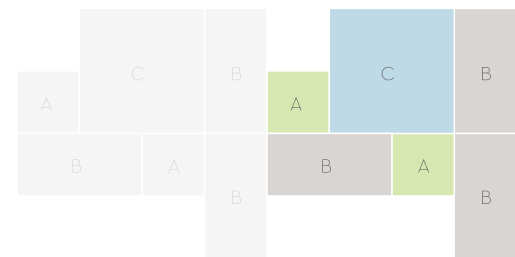


3-Piece Mini Set CARTON INCLUDES:			
LAYOUT KEY	SIZE	QTY	SQ FT
A	6" x 6"	2 pieces	.5
B	6" x 12"	3 pieces	1.5
C	12" x 12"	1 pieces	1
TOTAL		6 pieces	3 sq. ft
Actual = 197.2 sf per pallet		1,720 lbs per pallet	



CLASSIC SET

STRAIGHT EDGE

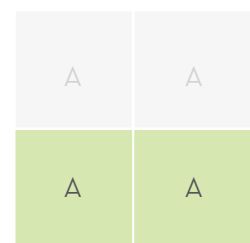

CARTON INCLUDES:			
LAYOUT KEY	SIZE	QTY	SQ FT
A	24" x 24"	2 pieces	8
TOTAL		2 pieces	8 sq. ft
Actual = 248 sf per pallet		2,292 lbs per pallet	